


DF-4300T

Digital Advertising Display




Product Parameters

DF-4300T (for model 43")

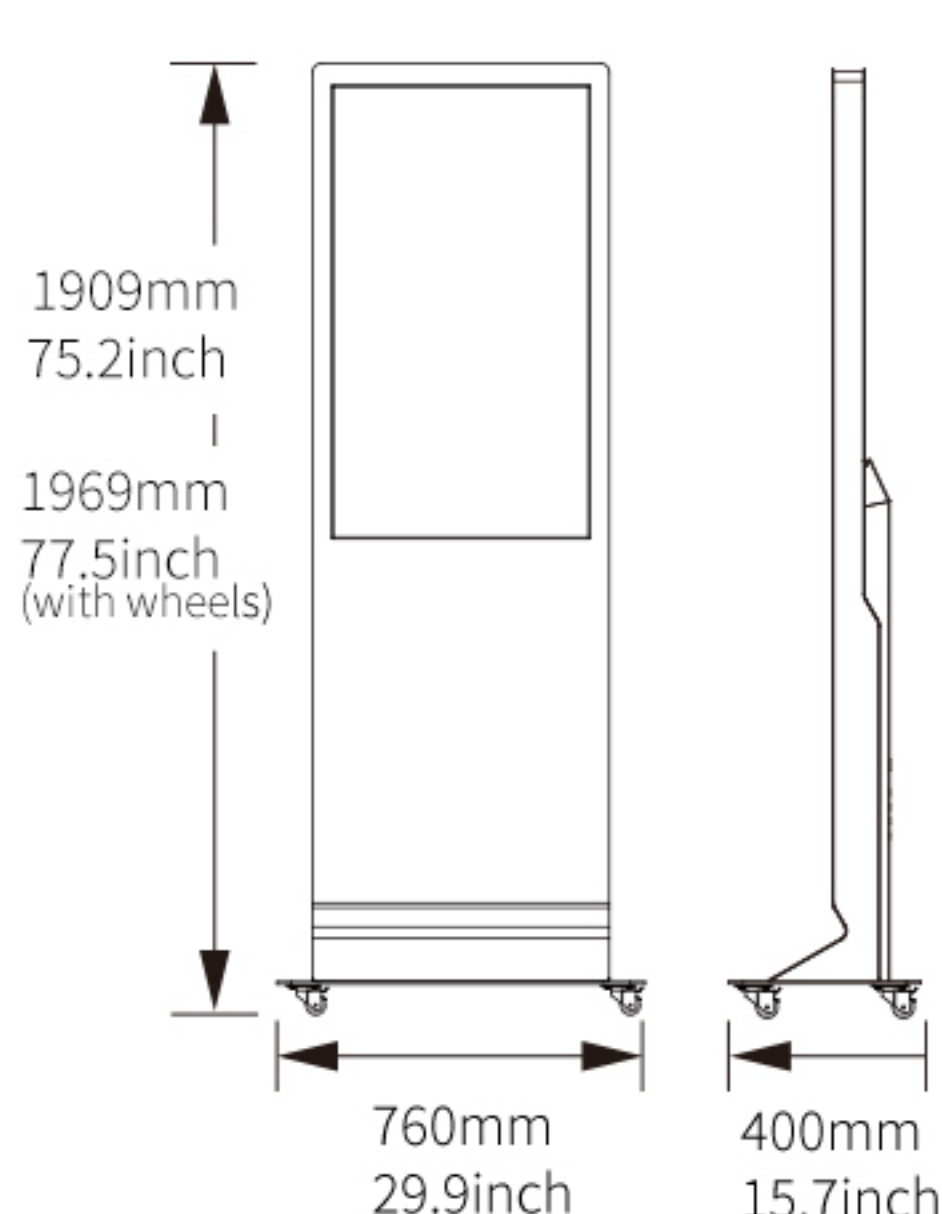

DF-5500T (for model 55")

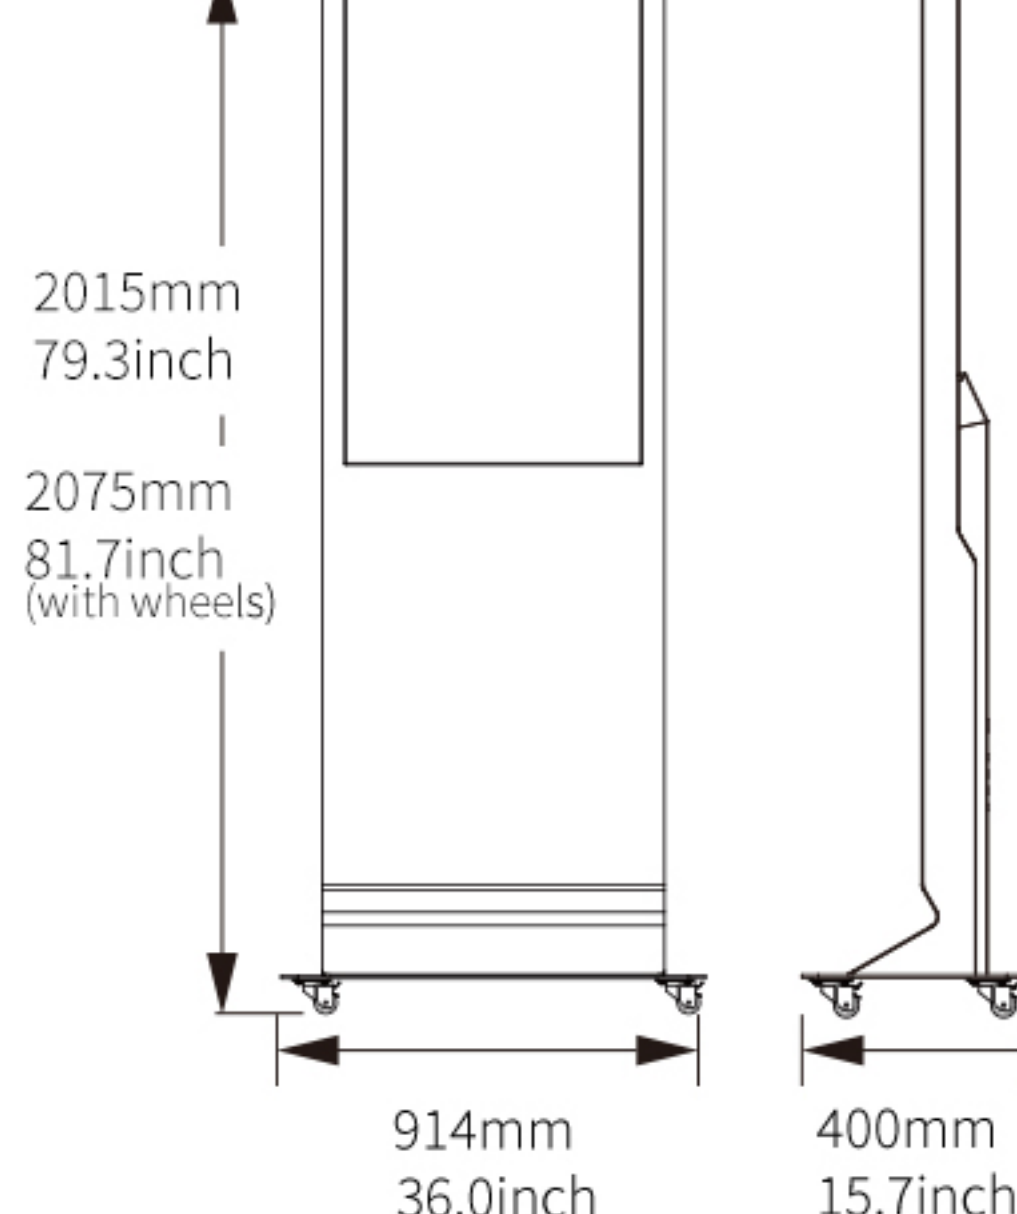


OS Support				
Operating System	WIN 10 (Trial version)		Android 11	
CPU	Intel Celeron J6412 Quad-core 2G		RK3568 Cortex-A55 quad-core 2.0GHz	
System Memory	4G/8G		2G/4G	
Disk	128G/256G(SSD)		16G/32G	
Interface				
Speaker	5W*2		5W*2	
Interface	USB*2/RJ45*1		USB*2/RJ45*1	
Network	Ethernet/WIFI		Ethernet/WIFI	
LCD				
Type	TFT-LCD		TFT-LCD	
Screen Size	43 inch		55 inch	
Max Resolution	1920 x 1080		3840 x 2160	
Aspect Ratio	16 : 9		16 : 9	
Brightness	400 cd/m²		800 cd/m²	
Panel Life	30000 hours		50000 hours	
Contrast Ratio	1200:1		1200:1	
Response Time	8ms		8ms	
Viewing Angle	H178° V178°		H178° V178°	
Display Colors	16.7M		1.07B	
Refresh Rate	60Hz		60Hz	
Touch Screen				
Type	Projective Capacitive Touch(10 points)		Response Time	10ms
Power				
Voltage	100-240VAC , 50/60Hz		Power Consumption	<75W(43 inch) / <100W(55 inch)
Enclosure				
Material	SPCC		Surface	Powder coating
Net Weight	73kg(43 inch) / 99kg(55 inch)		Gross Weight	151kg(43 inch) / 191kg(55 inch)
Overall Size	L760×W400×H1909 mm / L760×W400×H1969 mm (43inch with wheels) L914×W400×H2015 mm / L914×W400×H2075 mm (55inch with wheels)			
Package	L2095×W870×H610 mm (43 inch) / L2190×W1030×H610 mm (55 inch)			
Application				
Working Temperature	0~40℃		Storage Temperature	-20~60℃
Working Humidity	20%~80%		Storage Humidity	10%~90%
Application	Indoor			


Product Features



- The multi-point touch technology support powerful interactive features and applications are wider.

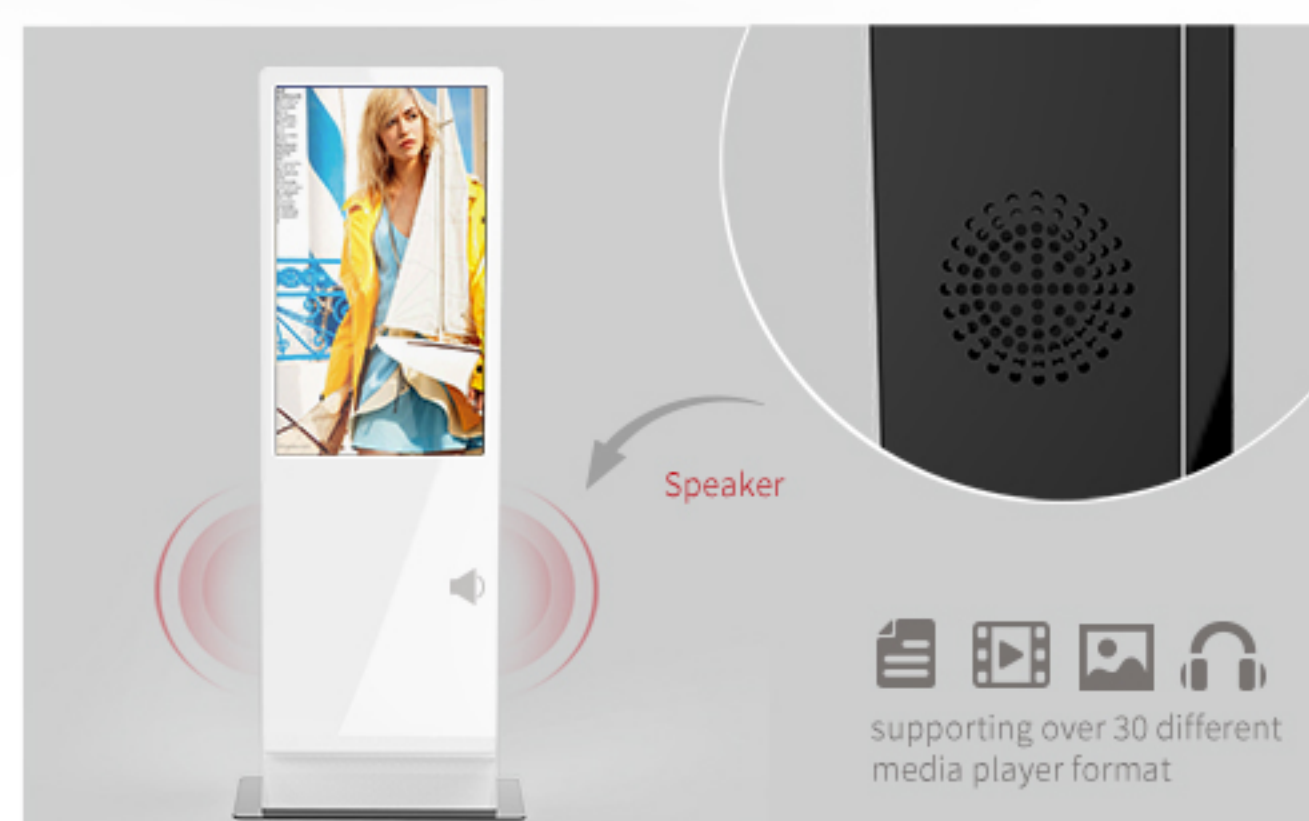

- Designed with two - channel speakers

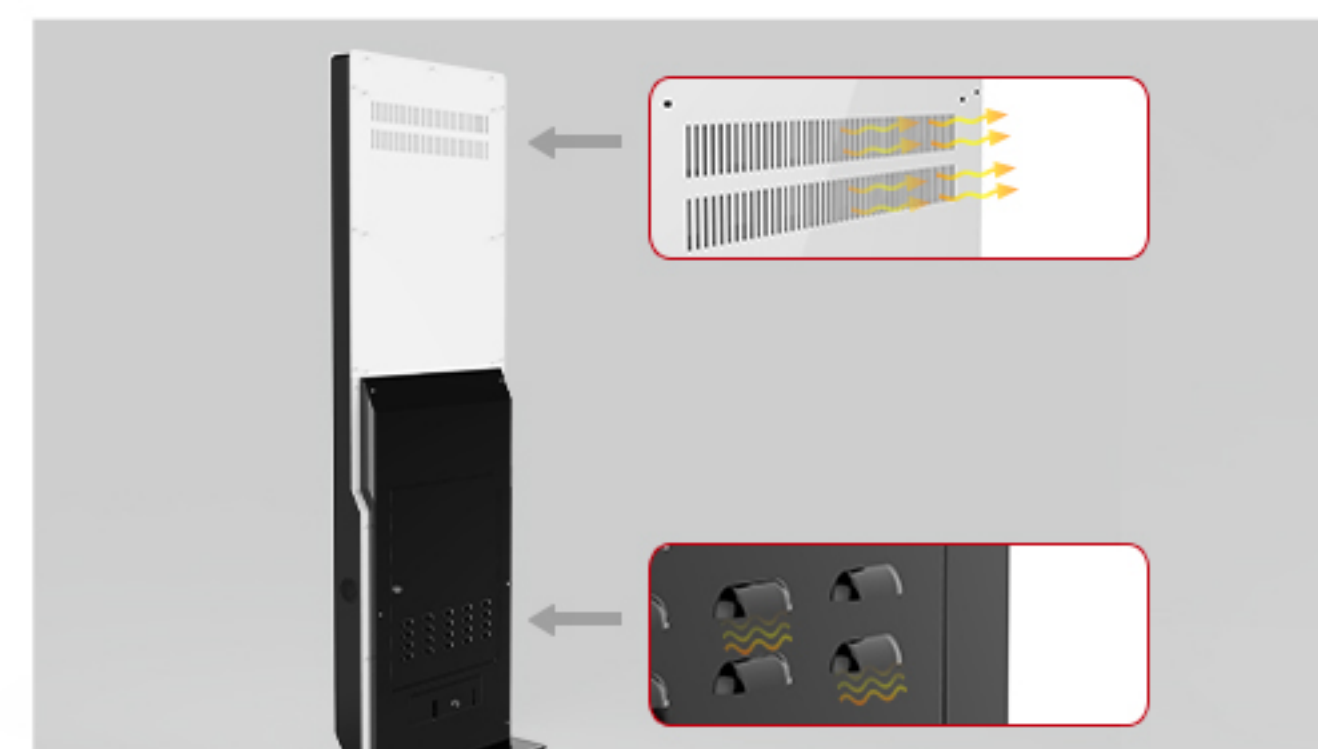


- Holes for heat dissipation



- For additional ports can be customized

Specs & Assembly

Mounting Options

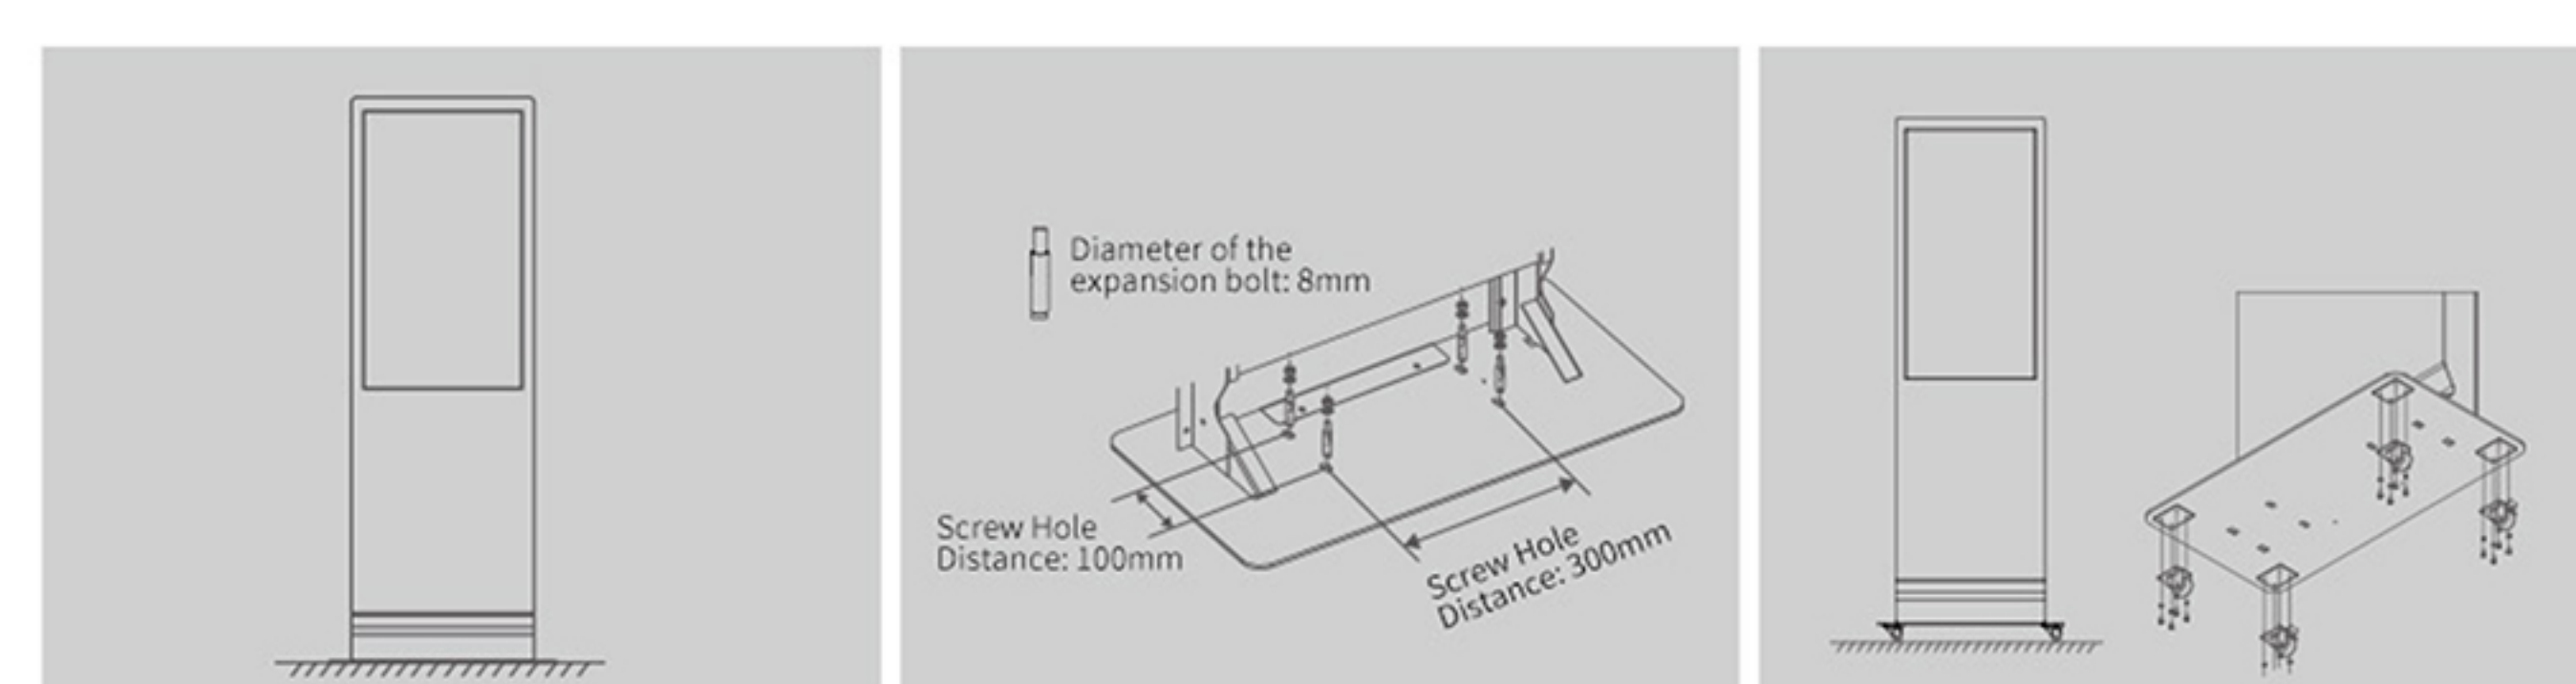

Free Floor Standing without wheels

Screw the stand base to the floor for fixed placement

Free Floor Standing with Wheels

Packing List



Product
x1



Key
x2




Expansion Screws
x4




Fuse Tool
x1



Power Cord
x1



User Manual
x1



Certificate
x1

Application Scenarios

