


KF-4300


Digital Signage



Product Parameters

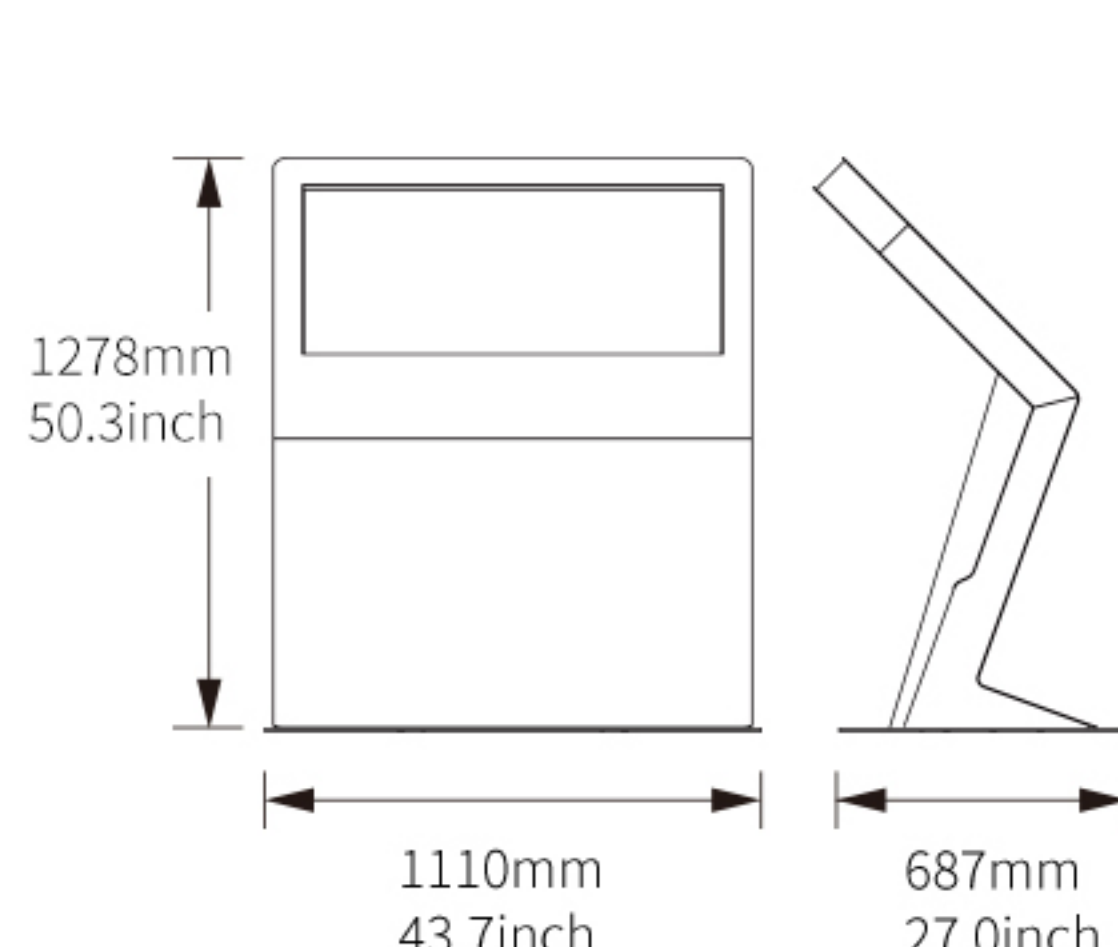

KF-4300 (for model 43")

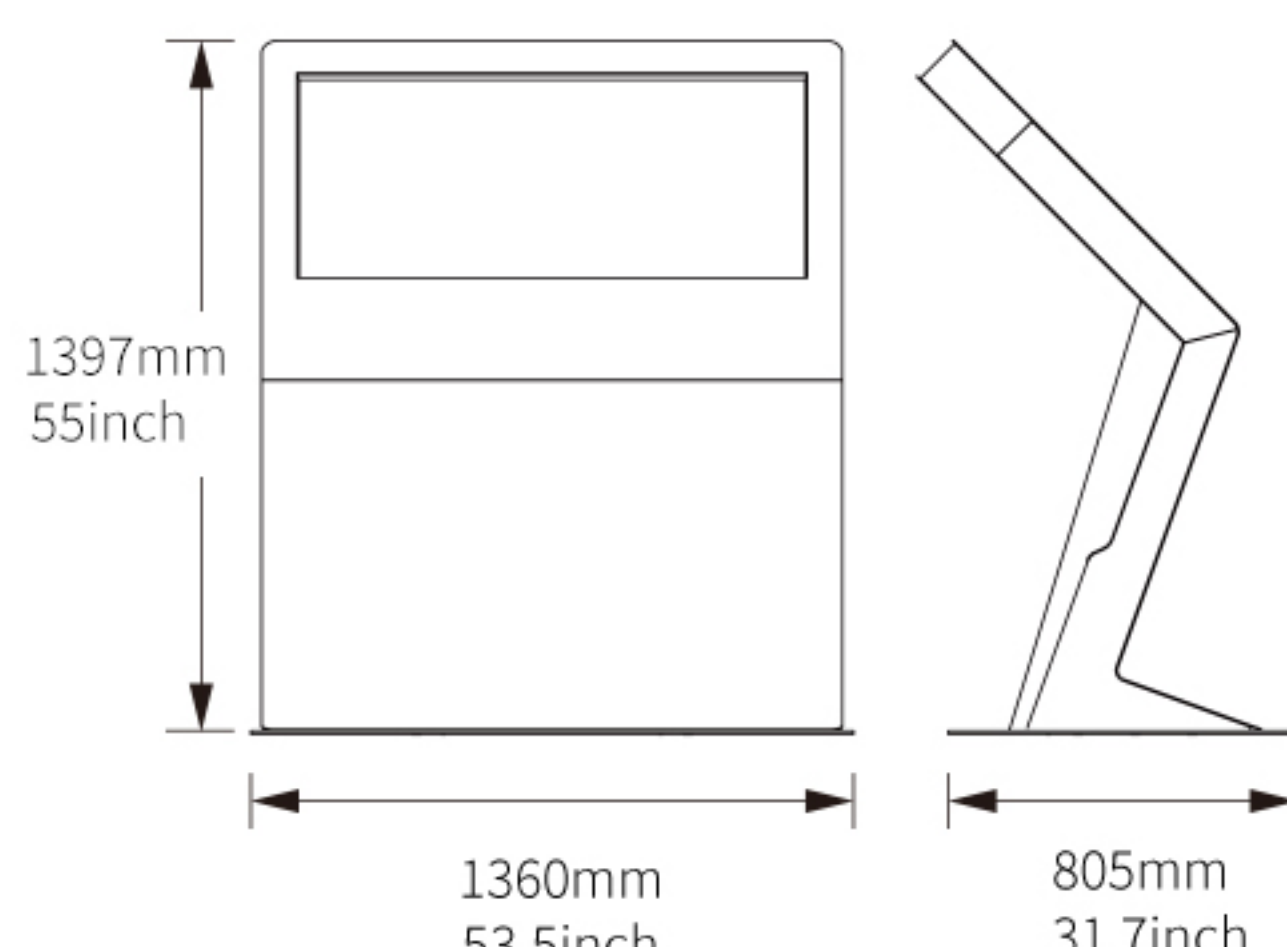

KF-5500 (for model 55")

OS Support			
OS Support	WIN 10 (trial version)	Android 11	
CPU	Intel Celeron J6412 qual-core 2.0G	RK3568, Cortex-A55 quad core, 2.0GHz	
Sysrem Memrty	4G/8G	4G	
Disk	128G/256G(SSD)	32G	
Speaker	5W*2	5W*2	
Interface	USB*2/RJ45*1	USB*2/RJ45*1	
Network	RJ45/WIFI	RJ45/WIFI	
LCD			
Type	TFT-LCD	TFT-LCD	
Screen Size	43 inch	55 inch	
Max Resolution	3840x2160	3840x2160	
Aspect Ratio	16:9	16:9	
Brightness	500cd/m²	800cd/m²	
Panel Life	30000 hours	50000 hours	
Contrast	1200:1	1200:1	
Response time	8ms	8ms	
Viewing angle	H178° V178°	H178° V178°	
Display Colors	1.07B	1.07B	
Refresh Rate	60Hz	60Hz	
Screen			
Touch screen	Projected capacitive touch(10 touch)	Response Time	10ms
Power			
Voltage	100-240VAC , 50/60HZ	Power Consumption	<105W (43inch) / <155W (55inch)
Enclosure			
Material	SPCC	Surface	Powder coated
Net weight	110kg(43 inch) / 140kg(55 inch)	Gross Weight	179kg (43 inch) / 220kg (55 inch)
Ocerall size	1110×687×1278 mm (43 inch) 1360×805×1397 mm (55 inch)		
Color	White, black or customized		
Application			
Working temperature	0~40°C	Storage temperature	-20~60°C
Woerking humidity	20%~80%	Storage humidity	10%~90%
Application	indoor		


Product Features



- The multi-point touch technology support powerful interactive features and applications are wider.



- Designed with two - channel speakers

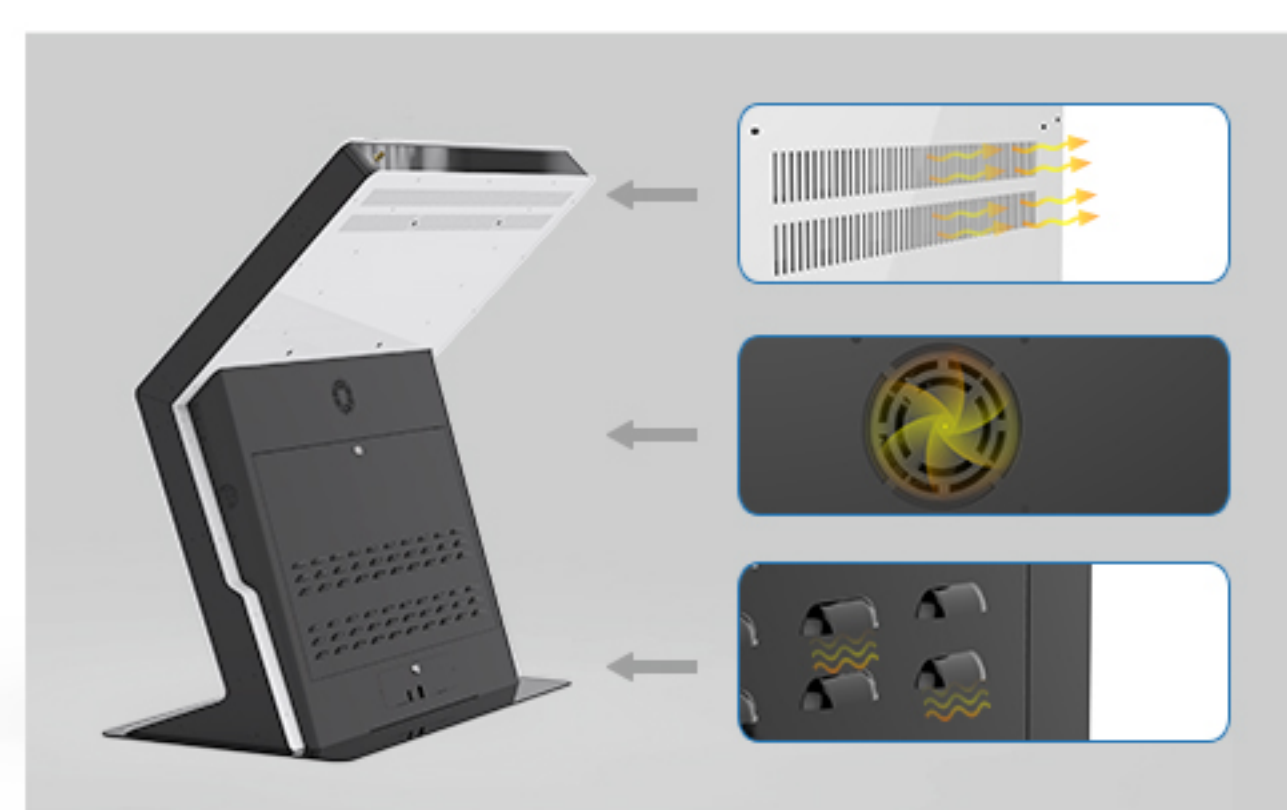

- Holes for heat dissipation



- For additional ports can be customized

Application Scenarios

