

15.6" ALL-IN-ONE KIOSK

EFFICIENCY PERFECTED

KH-1500C

- 15.6 inch PCAP touch screen
- Built-in high speed receipt printer, 2d scanner
- Indicator light
- Support Ethemet & WiFi



FEATURES



15.6" HD Touch Screen
10 point PCAP touch



2D Scanner



Built-in 80mm Thermal Printer



Indicator Light



Card Reader Holder
Adjustable width 50-90 mm

All-in-One Kiosk, Maximized Efficiency

Built with a rugged, all-metal unibody frame, the model is engineered for durability in high-volume commercial environments.

It streamlines operations by integrating a thermal receipt printer and a precision barcode scanner into a single, compact footprint.

Perfect for fast-paced settings like quick-service restaurants and retail, it accelerates checkout and boosts overall efficiency.




HD Touchscreen with Multi-Touch Sensitivity

The kiosk features a highly responsive 10-point PCAP touchscreen that delivers an exceptionally smooth and intuitive ordering experience.



Front-Access High-Speed Thermal Printer


It features an integrated 80mm thermal printer with a front-access compartment. A dedicated electronic release button allows staff to change paper rolls quickly without opening the main unit.

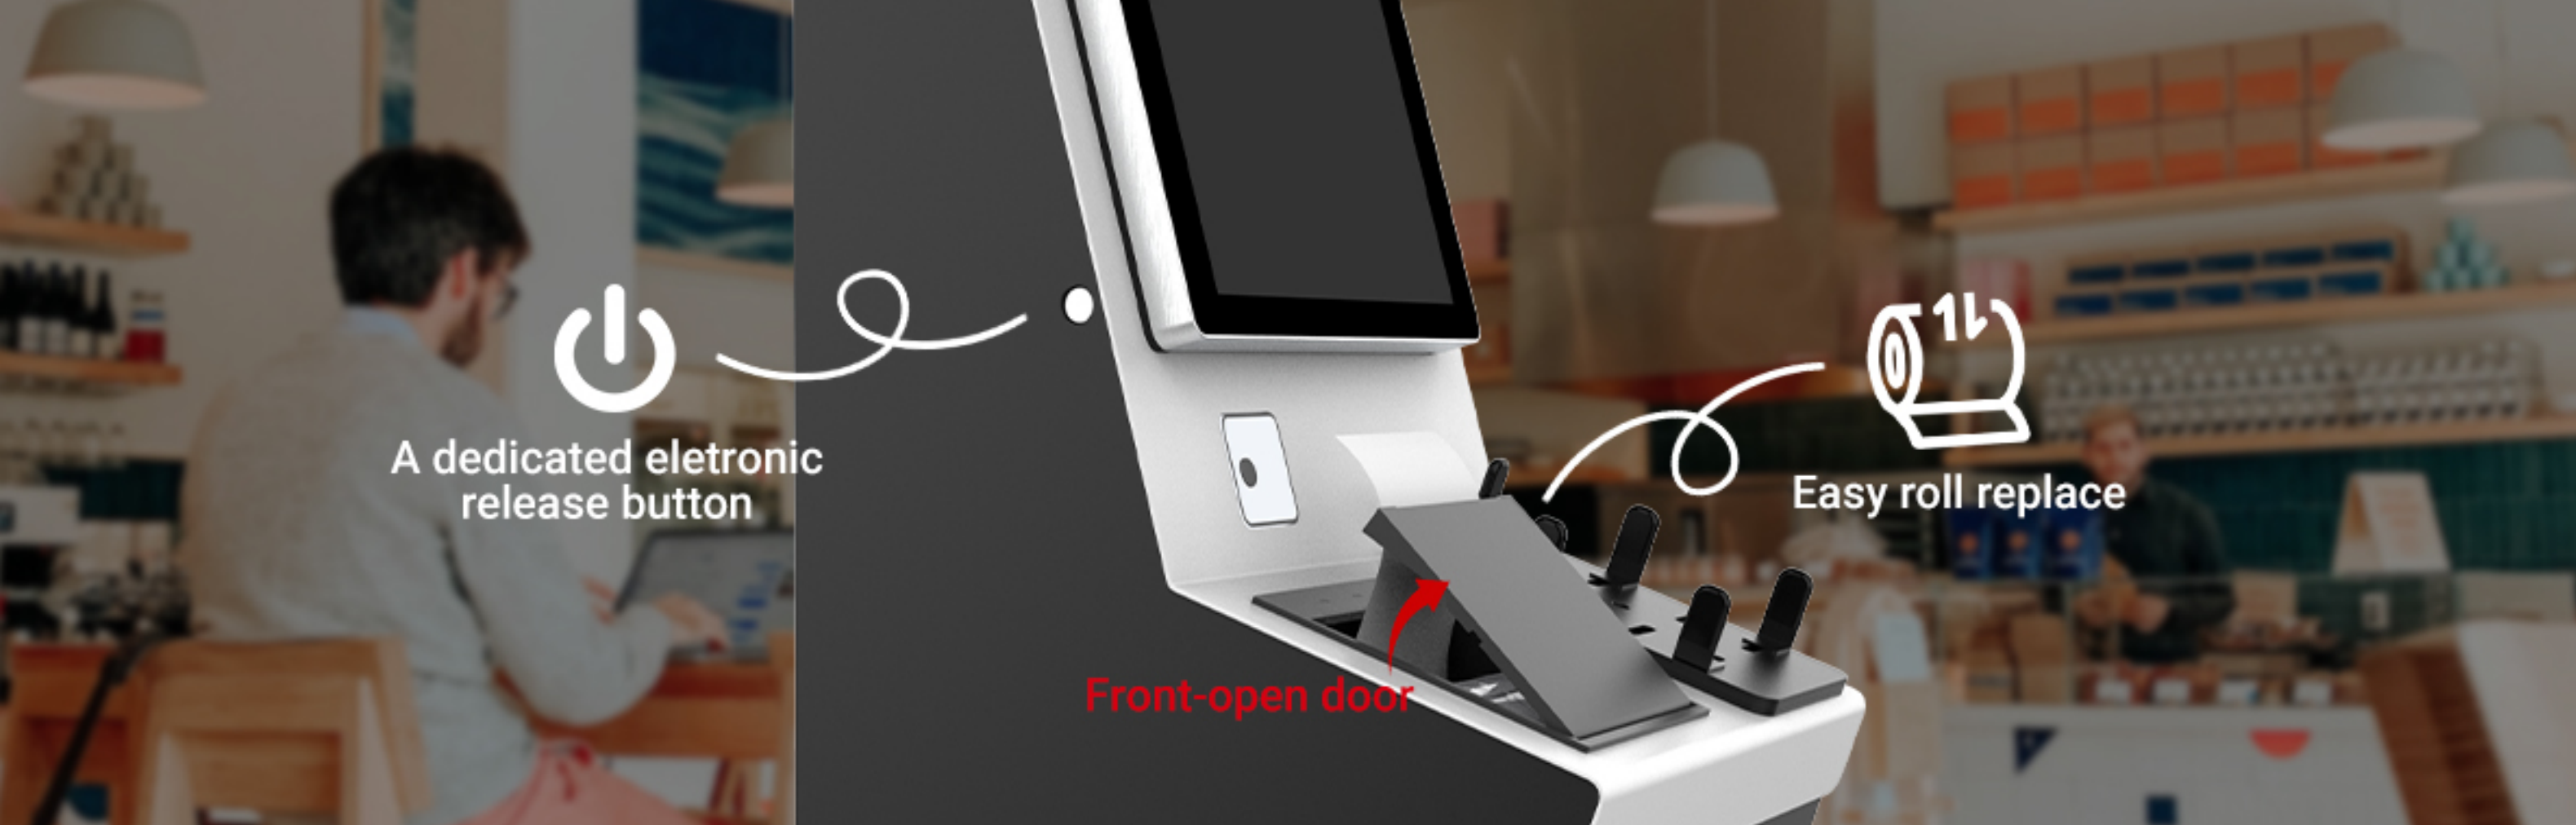

Versatile Payment Solutions

Built-in 1D/2D barcode/Qr code scanner.


Adjustable card reader holder to accommodate different POS terminals.

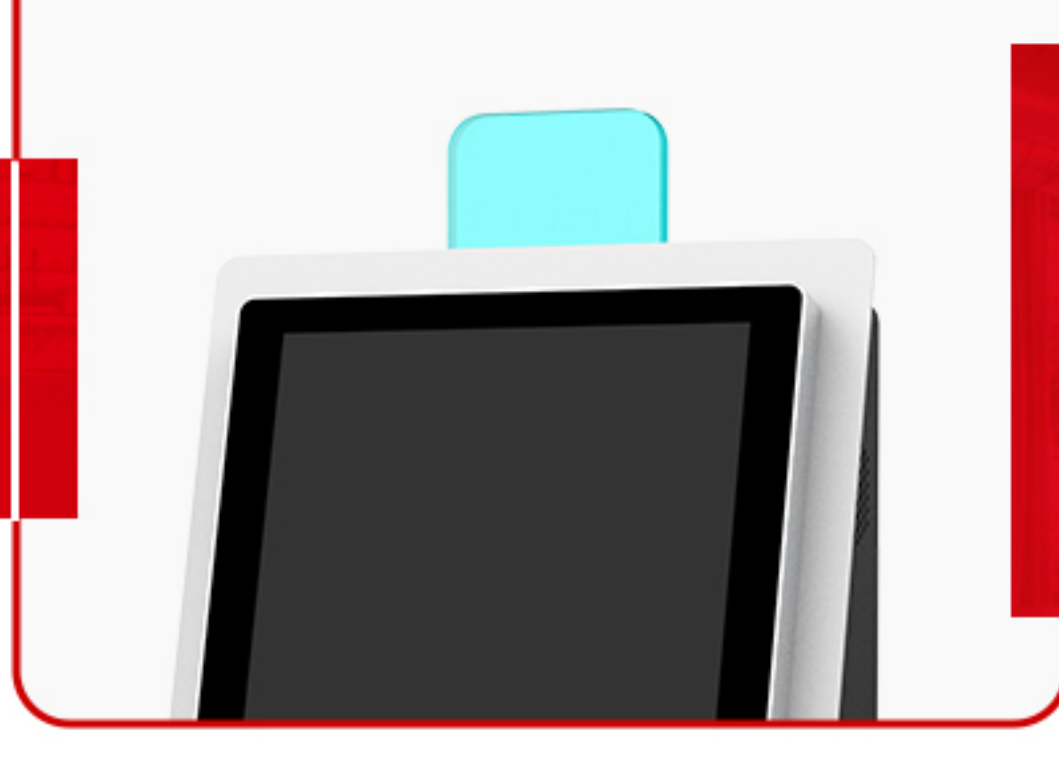


Integrated Status Indicator

An intuitive light system guides customers: green for an available station, and red (or off) to clearly communicate that it's temporarily unavailable.

APPLICATIONS



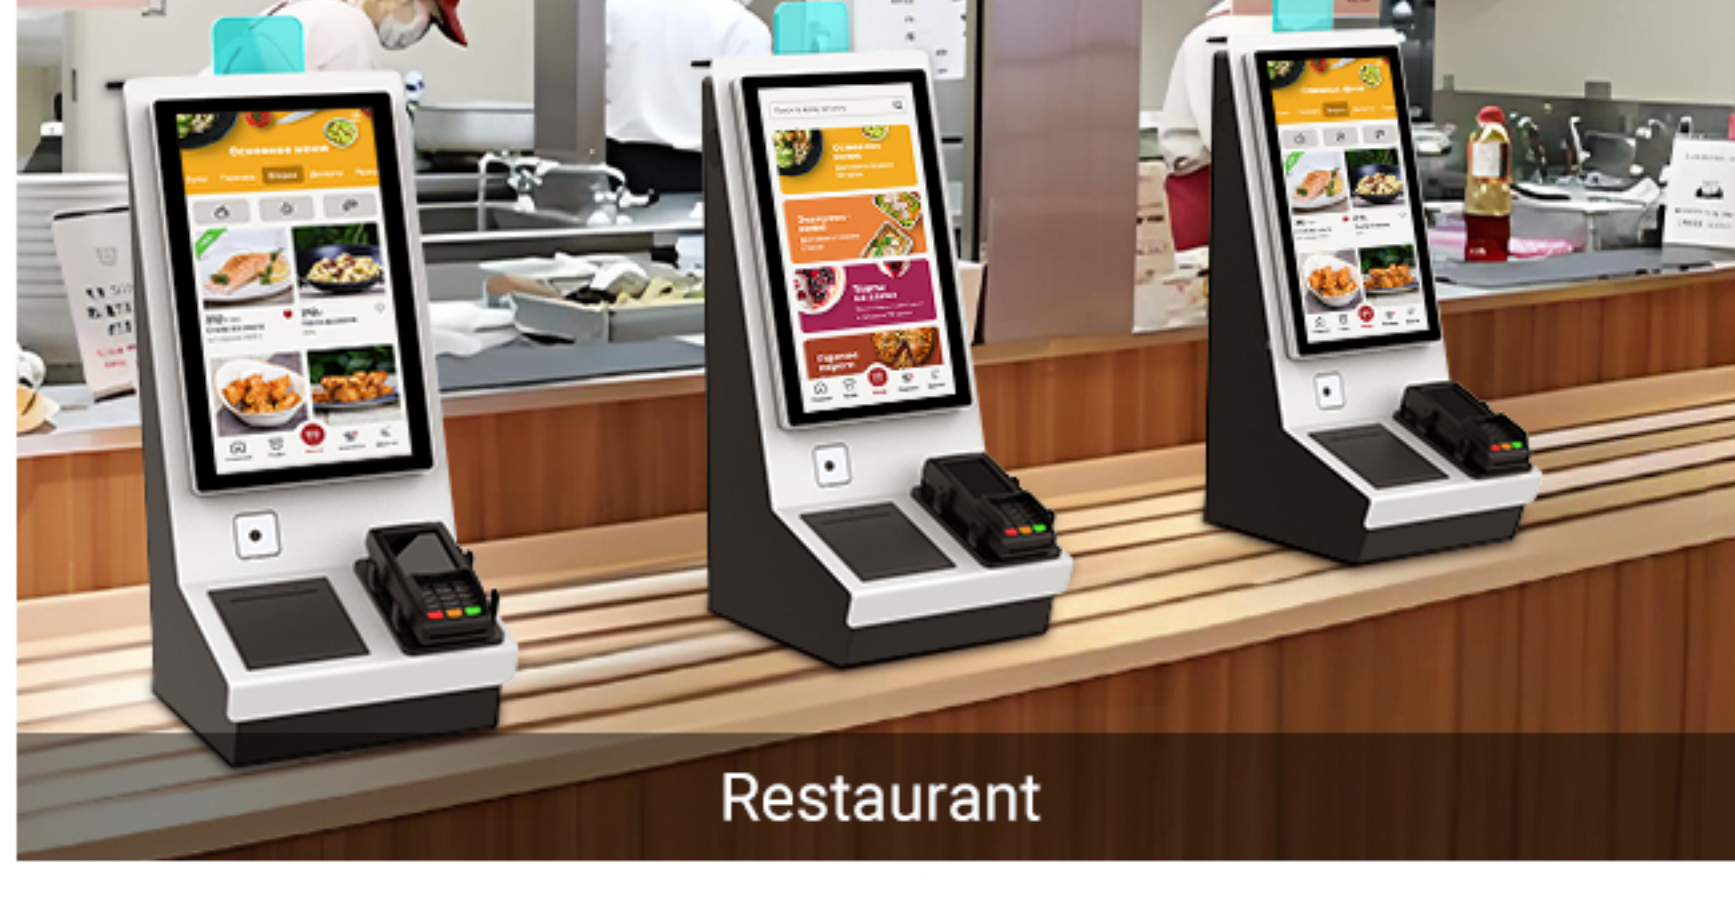


Restaurant

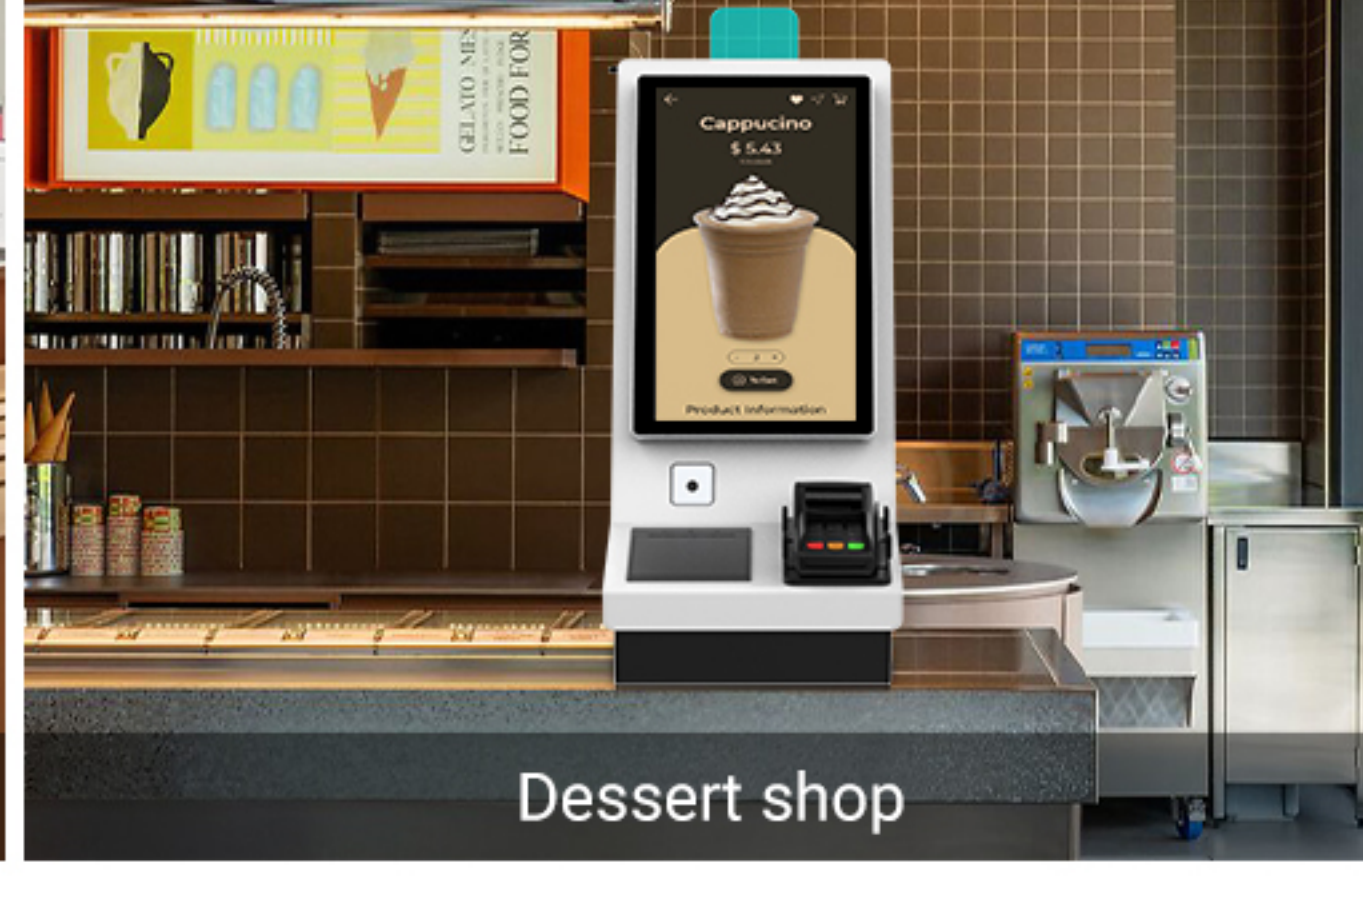

Dessert shop

SPECIFICATIONS

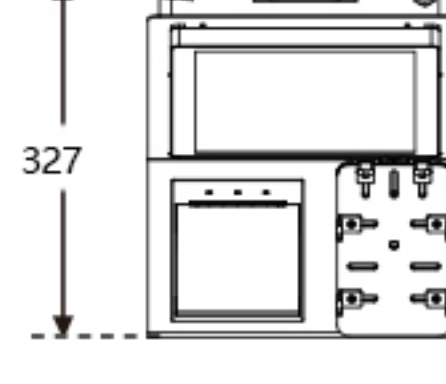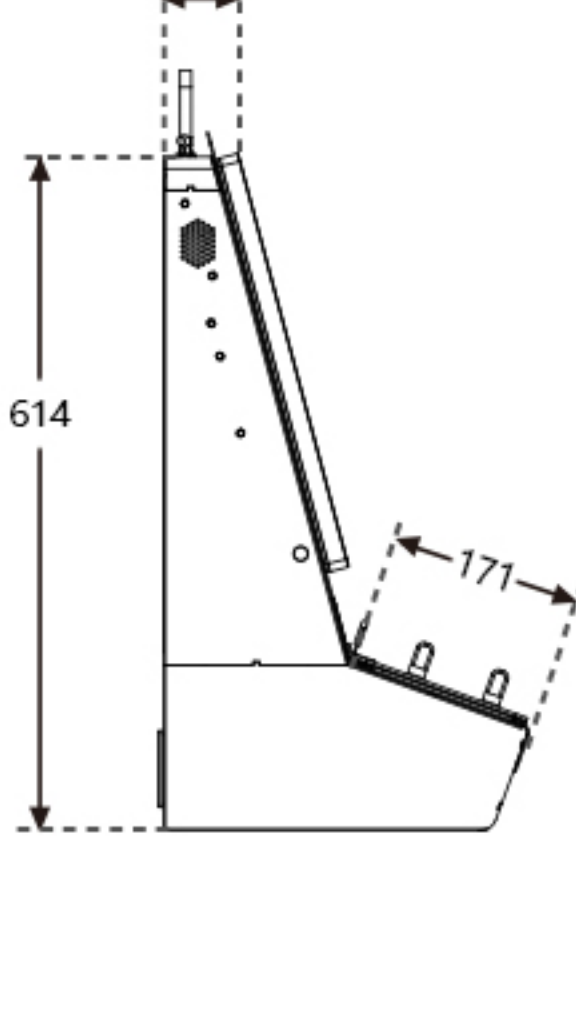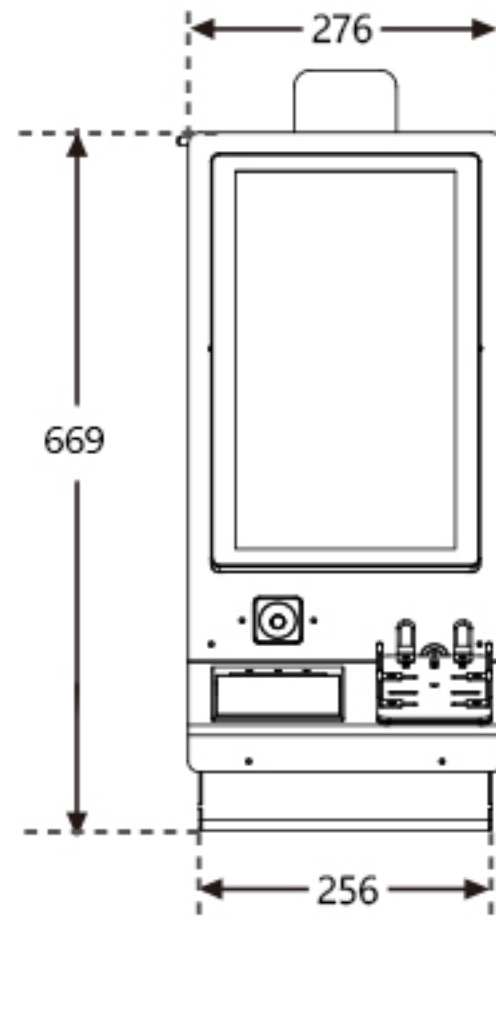

(unit mm)

OS Support			
Operating System	WIN 10 (Trial version)		Android 11
CPU	Intel Celeron J6412 Quad-core 2.0GHz		RK3568 Cortex-A55 Quad-core, 2.0 GHz
System Memory	4G/8G		4G
Disk	128G/256G(SSD)		32G/64G
Interface			
Speaker	5W*2		5W*2
Interface	USB*4/RJ45*1		USB*2/RJ45*1
Network	Ethernet / WIFI		Ethernet / WIFI
Touch Screen			
Type	PCAP	Response Time	10ms
Touch points	10 points		
LCD			
Type	TFT-LCD	Contrast Ratio	800:1
Screen Size	16.5"	Response Time	20ms
Max Resolution	1920×1080	Viewing Angle	H170° V170°
Aspect Ratio	16:9	Display Colors	16.2M
Brightness	300cd/m²	Refresh Rate	60Hz
Panel Life	15000 hours		
Power			
Voltage	100-240VAC , 50/60Hz	Power Consumption	<85W
Enclosure			
Material	SPCC	Surface	Powder coating
Overall Size (mm)	W276 × D327 × H669		
Net Weight (kg)	15		
Mounted Module			
Scanner	1D/2D	Printer	80mm thermal printer with auto cutter
Indicator light			
Application			
Working Temperature	0~40℃	Storage Temperature	-20~60℃
Working Humidity	20%~80%	Storage Humidity	10%~90%
Application	Indoor		